




The G-7 moisture meter - A rugged resistance-type meter, designed for testing the moisture content of grains at harvest time and while in storage. The integral double-disc electrode cup already works already with a sample volume of just 3-4 grams. As a result, you will have the ideal portable moisture measure instrument for more uniform sampling, providing you accurate and repeatable tests.

The G-7 - Comes equipped with a connector that holds any Delmhorst electrode. As a result, it turns your moisture meter into a multiple uses instrument for easy testing grains in bulk, packed in bags and in addition to test baled hay.

The G-7 - Includes a storage menu that allows you to view and analyse the stored reading and will display the various statistics about the performed tests.

Your Benefits:

- Built-in calibrations for barley, coffee, corn, flax, hay, oats, pasta, rapeseed, rough rice, rye, sorghum, soybeans, and wheat
- Built-in temperature correction over the range of 0-70° C (32-160° F)
- Programmable offset to match elevator
- Stores up to 150 accumulated readings in user-defined batches by grain
- Displays the average and highest readings, and standard deviation and co-efficient of variance of stored readings
- Audible, adjustable alarm alerts you when a pre-selected MC has been reached
- Built-in connector accepts any Delmhorst electrode
- Built-in calibration check
- Moisture Range: 9%-30% MC, depending on the grain
- Size: 18 x 15 x 14cm (7¼" x 6" x 5½")
- Weight: 1,8 kg (4 lbs.)
- Rugged construction ensures years of reliable use
- 9V battery
- 1-year warranty

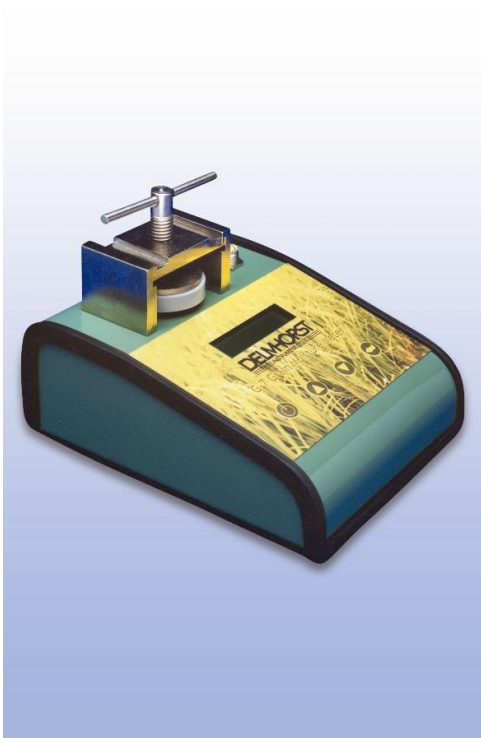



Recommended electrodes:



830-X

Pen electrode available in different lengths:
830-2 – 25cm (10")
830-3 – 45cm (18")
830-4 – 90cm (36")

(Requires H-4 Handle)

For moisture measuring in standard and high density bales



831

Short needle electrode

(Requires H-4 Handle)

For testing MC of hay in the windrow



832

Long needle electrode

(Requires H-4 Handle)

For measuring moisture in grains and seeds in bulk



H-4

Handle for electrodes 830-x, 831 and 832.

Two handed operation is recommended over using an electrode that connects directly to the top of the meter (like our 1235 series) to minimize stress placed on the meter casing.

Recommended accessory:



303BRU-0012

Brush to clean the sample cups, to keep the moisture measurements accurate.